



Chemical protection

# ULTRANITRIL 492

Frequent contact | intermittent wear



CHEMICAL PROTECTION  
**TYPE A**

EN388



3101X

EN ISO 374-1



TYPE A  
AJKOPT

CAT.3



0334

EN ISO 374-5



VIRUS

DEXTERITY

EN 420:  
5/5



G2  
ISO 18889

Good mechanical resistance and long-lasting chemical protection

## SPECIFIC ADVANTAGES



### Comfort

- Dexterity and comfort, due to the anatomical shape and the quality of the flock-lining



### Durability

- Longer service life: excellent mechanical resistance (abrasion, perforation)



### Guaranteed quality

- Silicone free to prevent traces, defects on metal sheet and glass prior to painting



### Additional benefits

- Available in vending machine packaging

## INDUSTRIES

- Automotive/mechanical industry
- Local Authorities (Cleaning)
- Local Authorities (Parks and Public Spaces)
- Construction Industry (Masons / Plasterers)
- Construction Industry (Carpenters/Joiners)
- Agriculture sector

## APPLICATIONS

- Spray mixtures preparation
- Pesticides handling
- Tank filling
- Application & spreading of pesticides
- Pesticides waste management
- Treatment equipment cleaning
- Handling aggressive chemical products
- Plant Treatment Products
- Handling oils, solvents, detergents
- Preparing coatings, varnishes



Chemical protection

# ULTRANITRIL 492

Frequent contact | intermittent wear


## LEGENDS

EN388

MECHANICAL HAZARDS



PERFORMANCE LEVELS (X = NOT TESTED)

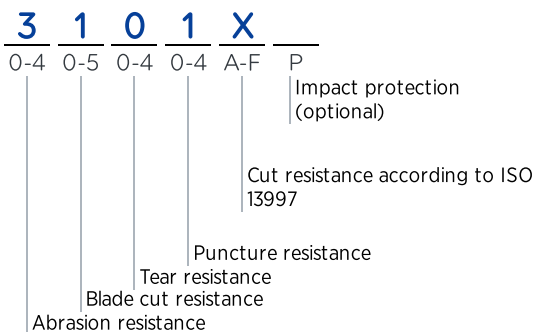

EN ISO 374-1

CHEMICAL RISKS



TYPE A

A: Methanol  
J: n-Heptane  
K: Sodium hydroxide 40%  
O: Ammonia 25%  
P: Hydrogen peroxide 30%  
T: Formaldehyde 37%



PROTECTION FROM PESTICIDES

G2: Diluted & concentrated pesticides / Mechanical risk

ISO 18889

EN ISO 374-5

MICRO-ORGANISMS



VIRUS

Protection against bacteria, fungi and virus

## PRODUCT DETAILS

Interior finish	Flocked
Exterior finish	Embossed texture
Material	Nitrile
Cuff characteristic	Straight cuff
Colour.s	Green
Length (cm)	32
Thickness (mm)	0.38
Size	6 7 8 9 10 11
Surface resistance according to EN1149-1 (Value in palm area at 25% relative humidity)	6.4E+10 Ω
Vertical resistance according to EN1149-2 (Value in palm area at 25% relative humidity)	5.8E+9 Ω

## LOGISTIC DETAILS

Packaging	1 pair/bag 10 pairs/bag 100 pairs/carton
-----------	--

## LEGISLATION

- This product is not classified hazardous according to the regulation (EC) n°1272/2008 of the European Parliament and of the Council.
- This product does not contain more than 0.1 % of substance of very high concern (SVHC) or any substance included in the annex XVII of the regulation n° 1907/2006 of the European Parliament and of the Council (REACH).
- UE type certificate or CE type examination certificate: 0075/014/162/08/18/1631
- Issued by the notified body nr: 0075 CTC - 4, rue Hermann Frenkel - 69367 Lyon Cedex 07- FRANCE
- Quality assurance certificat: 0334 - Asqual 14 rue des Reculettes -75013 Paris - France

Edit 13/12/2021

MAPA SAS capital de 35.000.010 €

420, rue d'Estienne d'Orves

92705 Colombes Cedex France

RCS Nanterre 314 307 720

mapa-pro.com

**MAPA**  
PROFESSIONAL