




TECHNICAL PROPERTIES



EN388

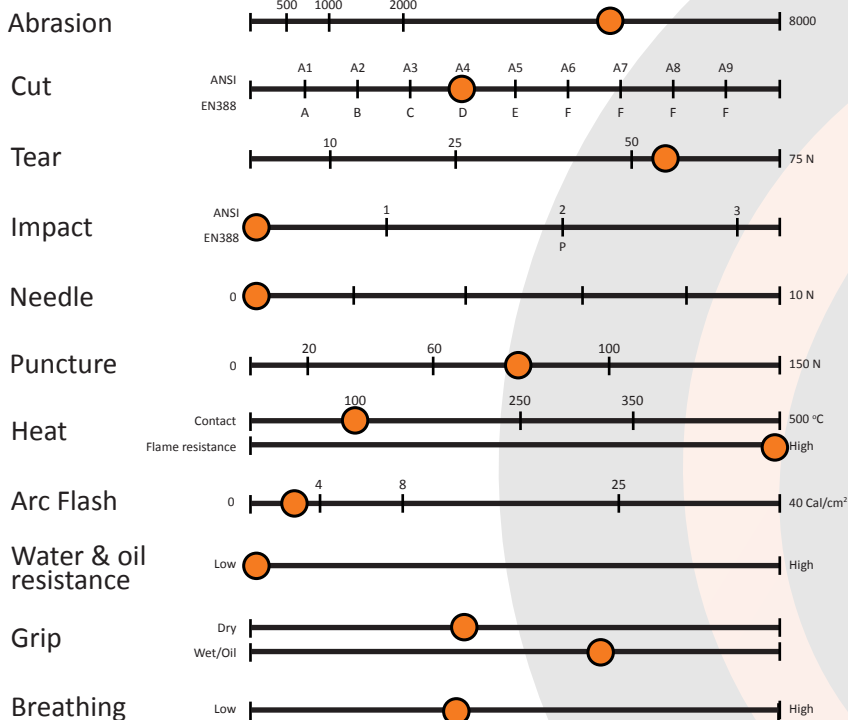

A: ABRASION (1-4)
B: CUT (1-5)
C: TEAR (1-4)
D: PUNCTURE (1-4)
F: ISO CUT (A-F)
P: IMPACT PROTECTION

3X31D

EN407



A: FLAMMABILITY (1-4)
B: CONTACT HEAT (1-4)
C: CONVECTIVE HEAT (1-4)
D: RADIAL HEAT (1-4)
E: SMALL SPLASHES OF MOLTEN METAL (1-4)
F: LARGE QUANTITIES OF MOLTEN METAL (1-4)

41XXXX

ARC FLASH

ASTM F2675, ATPV=
5,9 Cal/cm² (back of hand)
22 Cal/cm² (palm)


EN 61482 Modified by Aitex (Box Test)=

Class 1

NFPA 70E=

Level 1

ISO (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | > 22 N
F | > 30 N



ART.NO: 15-4HAF-4
60 pairs (5 dozen)/Carton