




TECHNICAL PROPERTIES



EN388

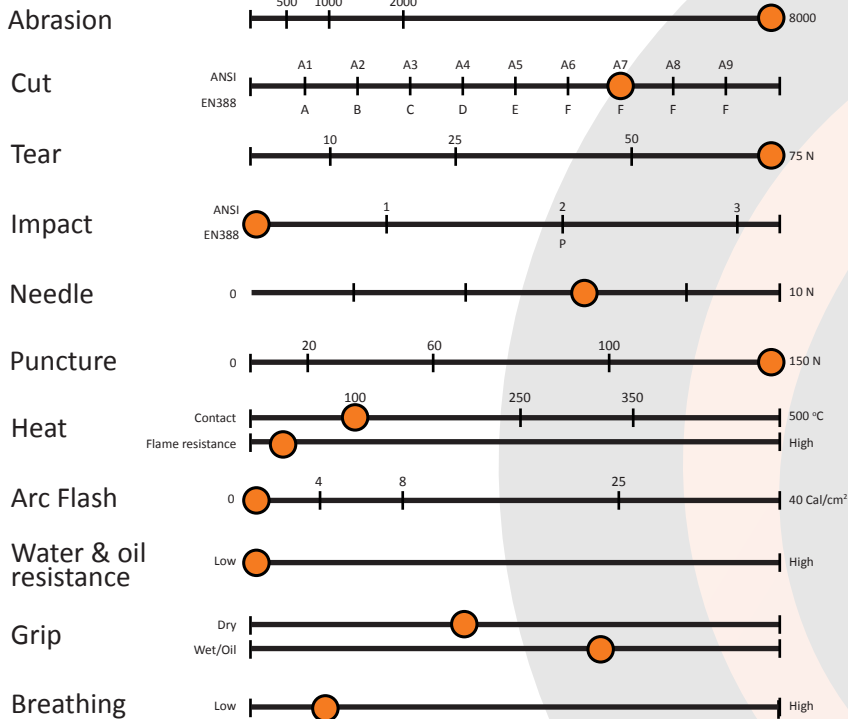

4X44F

A: ABRASION (1-4)
B: CUT (1-5)
C: TEAR (1-4)
D: PUNCTURE (1-4)
F: ISO CUT (A-F)
P: IMPACT PROTECTION

ISO (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | > 22 N
F | > 30 N



ASTM F2878
6 N

ART.NO: 15-4PSOFT
12 pairs (1 dozen)/Carton



7	8	9	10	11	12
XS	S	M	L	XL	XXL