



UNSUPPORTED LATEX/NEOPRENE COATING WITH AN EMBOSSED GRIP

A flexible glove that absorbs perspiration and protects the hand from a wide range of chemicals as well as providing good grip. Double-dipped for long-lasting resistance.

FEATURES

- › Resistant to a broad range of chemicals
- › Impermeable for working in damp or greasy environments
- › Self-flushing tractor-tread grip encourages fluids to run-off
- › Cuff prevents dirt from entering the glove
- › Surface provides good grip and wet substances can be repelled
- › Blue colour spotted when the coating is damaged
- › Packaging that helps finding the right model in displays
- › Wrist well protected
- › Thickness: 0.66mm



SUITABLE FOR

Typical Industries

- Aerospace
- Automotive
- Chemical
- Manufacturing

Suitable Applications

- Acid Components
- Assembly
- Battery Manufacturing
- Chemical Processing
- Pesticide Maintenance
- Printing Maintenance

CERTIFICATION

CAT III	EN 388:2016	EN ISO 374-1:2016/Type A	EN ISO 374-5:2016
2777	2021X	AJKLMNT	

See overleaf for explanation





PRODUCT INFORMATION

MATERIALS	LINER:	Cotton flock
	COATING:	Neoprene on Latex
COLOUR	Blue/black	
LENGTH (mm)	305	
CUFF STYLE	Gauntlet	

ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	BSTCHMS1	12 pairs per bag
8/M	BSTCHMS2	144 pairs per case
9/L	BSTCHMS3	
10/XL	BSTCHMS4	


RECOMMENDATIONS FOR USE

- **USE:** Chemical resistant glove. Not suitable for thermal, electrical, cut protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use

CERTIFICATION LEGENDS



MECHANICAL HAZARDS EN 388:2016 PERFORMANCE LEVELS*

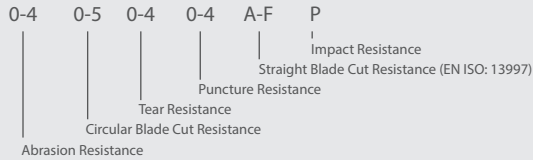

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

EUROPE

www.globusgroup.com

E: sales@globus.co.uk
T: +44 (0)161 877 4747
F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICA

www.globusgroup.com/gcc

E: gcc@globusgroup.com
T: +971 4 882 9962
F: +971 4 882 9963



Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES

©2020 Globus (Shetland) Ltd | SHO-DATA-CHM-0620_1