




TECHNICAL PROPERTIES



EN388

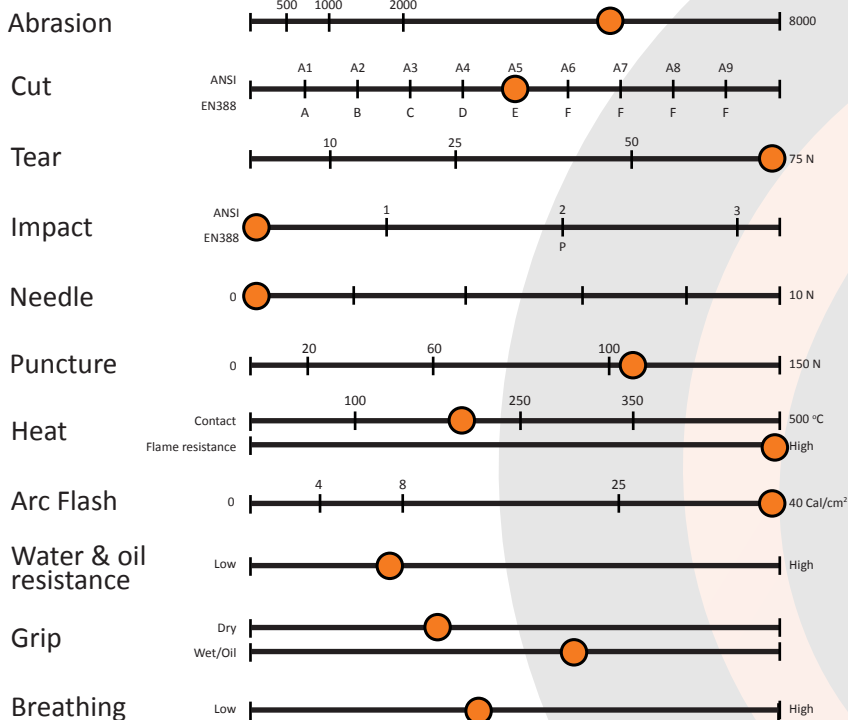

A: ABRASION (1-4)
B: CUT (1-5)
C: TEAR (1-4)
D: PUNCTURE (1-4)
F: ISO CUT (A-F)
P: IMPACT PROTECTION

4X42E

EN407



A: FLAMMABILITY (1-4)
B: CONTACT HEAT (1-4)
C: CONVECTIVE HEAT (1-4)
D: RADIAL HEAT (1-4)
E: SMALL SPLASHES OF MOLTEN METAL (1-4)
F: LARGE QUANTITIES OF MOLTEN METAL (1-4)

4131XX

ARC FLASH

ASTM F2675, ATPV=

59 Cal/cm² (back of hand)

42 Cal/cm² (palm)

EN 61482 Modified by Aitex (Box Test)=

Class 2

NFPA 70E=

Level 4

ISO (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | > 22 N
F | > 30 N



CE 1493
CAT III

ART.NO: 13-4HAF-50
12 pairs (1 dozen)/Carton

8	9	10	11	12
S	M	L	XL	XXL