




TECHNICAL PROPERTIES



EN388

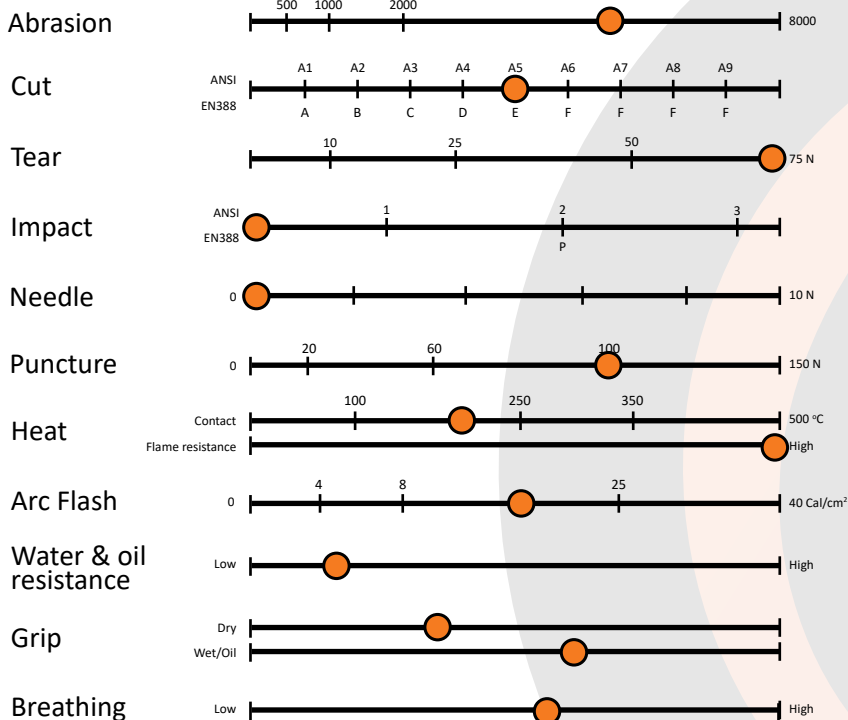

- A: ABRASION (1-4)
- B: CUT (1-5)
- C: TEAR (1-4)
- D: PUNCTURE (1-4)
- F: ISO CUT (A-F)
- P: IMPACT PROTECTION

3X42E

EN407



- A: FLAMMABILITY (1-4)
- B: CONTACT HEAT (1-4)
- C: CONVECTIVE HEAT (1-4)
- D: RADIAL HEAT (1-4)
- E: SMALL SPLASHES OF MOLTEN METAL (1-4)
- F: LARGE QUANTITIES OF MOLTEN METAL (1-4)

41312X

ARC FLASH

ASTM F2675, ATPV=
 17,1 Cal/cm² (back of hand)
 57,9 Cal/cm² (palm)
 NFPA 70E=
 Level 2

ISO (A-F)
 A | > 2 N
 B | ≥ 5 N
 C | ≥ 10 N
 D | ≥ 15 N
 E | > 22 N
 F | > 30 N



EN1149-1



1,18.10⁹ Ω

ART.NO: 13-4HAF-17
 60 pairs (5 dozen)/Carton

CE 1493 7 8 9 10 11 12
 CAT III XS S M L XL XXL